


# VSP 168S




## Key Features

- Support for resolutions up to 2048x1152 (2560x816)
- Seamless switching between inputs
- Multiple cascade for sync mapping
- 5 inputs including 3G-SDI
- DVI, 3G-SDI, HBaseT & FiberPort outputs
- Picture in picture
- Remote control by RS 232
- Compact 1U ½ width format with 1U & 2U rack housing options available

## Application

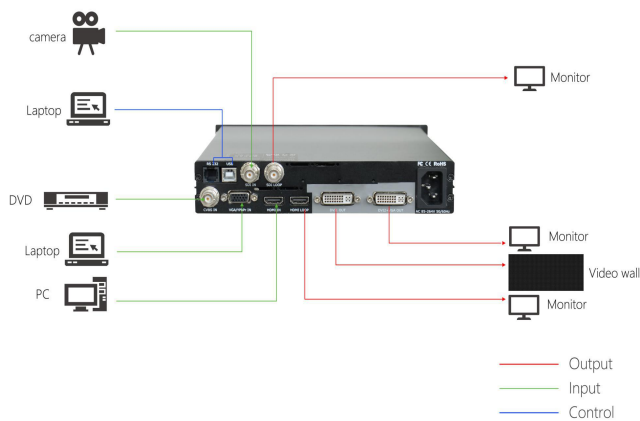

## Dimensions

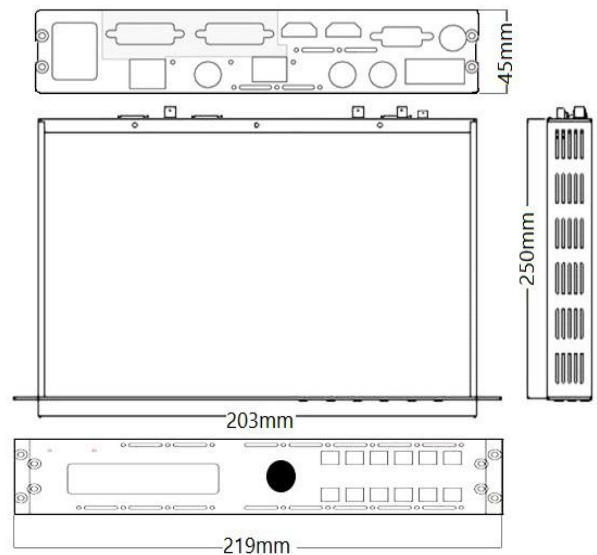

## Order Codes

Product Code	Item
100-0168-02-0	VSP 168S
900-1001-01-0	168RU1 -rack mount

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com  
 Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.



www.rgblink.com



## Specification

<b>Connectors</b>	Input	CVBS	1xBNC	
		SDI In/Loop	2xBNC	
		HDMI In/Loop	2xHDMI (DVI compatible)	
		VGA/YPbPr	1xDB15	
	Output	DVI	2xDVI (DVI 1   DVI 2 -VGA compatible)	
	Communication	RS232	1 x RS232	
		USB	1 x USB-B	
	Power		1 x IEC	
<b>Performance</b>	Input Resolutions	CVBS		
		SMPTE	480i   576i	
		SDI		
	SMPTE	480i   576i   720p@50/60   1080i@59.94/60   1080p@23.98/24/25/29.97/30/50/59.94/60   1080psf@23.98/24/25/29.97/30 /50/59.94/60		
	HDMI			
	SMPTE	480i   576i   720p@50/59.94/60   1080i@50/59.94/60   1080p@50/59.94/60		
	VESA	800x600@60   1024x768@60   1280x768@60   1280x1024@60   1366@768@60   1600x1200@60   1920x1080@60		
	VGA			
	VESA	640x480@60   800x600@60   1024x768@60   1280x720@60   1280x800@60   1280x960@60   1280x1024@60   1366x768@60 1440x900@60   1400x1050@60   1600x1200@60   1680x1050@60   1920x1080@60		
	Output Resolutions	<i>Select from below or configure customized</i>		
		DVI   VGA		
		VESA	800x600@60   1024x768@60   1280x768@60   1280x1024@60   1600x1200@60   1920x1080@50/60   2048x1152@60   2560x816@60	
		<i>Not all resolutions supported on VGA</i>		
	Supported Standard	HDMI	1.3	
		SDI	SMPTE 425M (Level A)   SMPTE 424M   SMPTE 292M   SMPTE 259M-C   DVB-ASI	
		DVI	Single DVI	
		VGA	UXGA	
<b>Features</b>	Signal Backup	Support		
	OSD	Support		
	EDID	Support		
	Remote Control	Windows App		
	Effects	Cut,Fade		
<b>Power</b>	Input Voltage	AC 85~264V 50/60Hz		
	Max Power	65W		
<b>Enviroment</b>	Temperature	0℃~40℃		
	Hudmidity	10%~85%		
<b>Physical</b>	Weight	Nett	1.3kg	
		Packaged	3.8kg	
	Dimension	Nett	219mm*250mm*45mm	
		Packaged	540mm*370mm*165mm	

